


DBF DIGGING BUCKET FLAT TOP

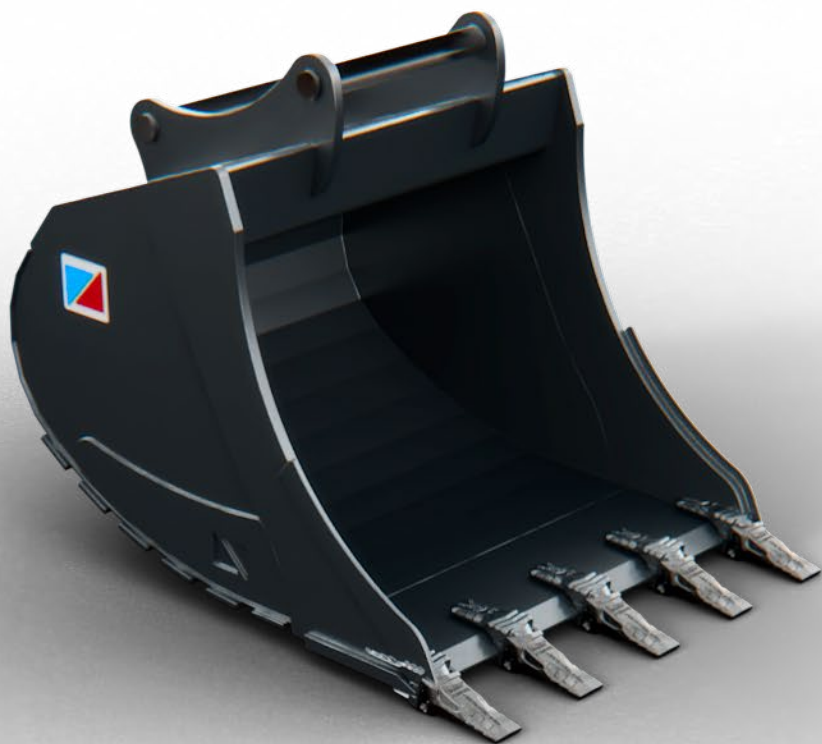


Maximize Excavator Digging Use: The DBF Flat Top Digging Bucket. Effortless attachment changes & superior performance for peak digging efficiency.

Key Features:

- **Optimized** for Quick Coupler Systems
- Superior Digging Performance - **Double Radius & Double Conical design**
- Durable Construction
- Available in **Economy** (up to 24 t), **Standard** (all sizes), **Heavy Duty** (24 t +) versions
- **Rock version** available
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your full-size excavator for maximized productivity with the DBF Excavator Quick Coupler Digging Bucket. This robust attachment offers exceptional digging performance and integrates seamlessly with your excavator's quick coupler system. Effortless attachment changes allow you to switch between digging tasks quickly, minimizing downtime and maximizing efficiency on any project.

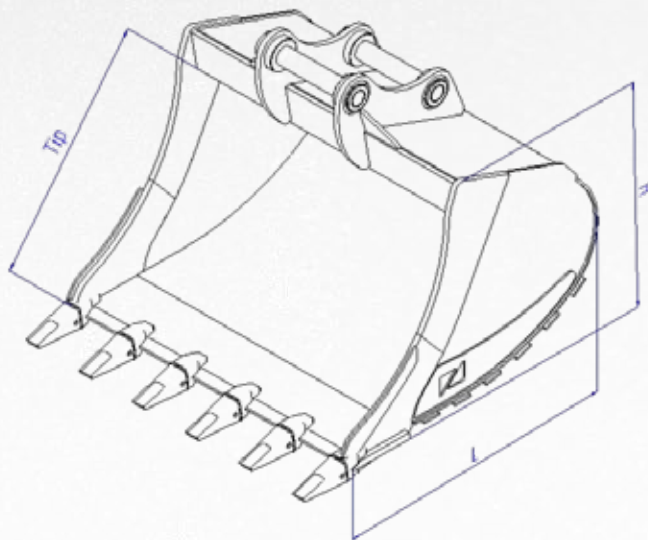

Direct connection



S1/S2/S3
B20/B27/B30



S-System



MS



OQ



SW



Martin



The DBF Excavator Quick Coupler Digging Bucket is ideal for:

- Large-scale excavation projects requiring frequent attachment changes (foundations, basements, trenches)
- Construction and demolition applications demanding flexibility and efficiency
- Streamlining workflows and optimizing excavator utilization on diverse jobsites
- Mining and quarrying operations with various digging requirements (Rock version)
- Any application where maximizing excavator uptime and versatility is crucial
- S-System, MS, SW, OQ, EasyLock, Martin, Volvo S etc. brackets

Upgrade your excavator's capabilities and conquer demanding projects with the DBF Quick Coupler Digging Bucket. Contact us today to discuss your project needs and choose the perfect bucket size for your machine!

	DBF-120	DBF-160	DBF-190	DBF-230	DBF-300	DBF-400	DBF-500
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40	40 - 50
L / H / Tip	1077/816/818	1157/877/877	1257/962/960	1337/1022/1020	1418/1100/1099	1573/1220/1225	1737/1375/1377
Width[mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
400 / 3	160 / 155						
500 / 3	216 / 177	250 / 256					
600 / 3	275 / 198	317 / 286	376 / 346	398 / 411			
800 / 4	400 / 241	461 / 346	544 / 419	578 / 495	630 / 580		
1000 / 5	536 / 284	615 / 406	724 / 492	769 / 579	844 / 674	1024 / 854	
1200 / 5	673 / 326	773 / 466	911 / 565	981 / 663	1069 / 768	1296 / 968	
1400 / 6			1102 / 638	1199 / 747	1306 / 862	1580 / 1083	1897 / 1470
1500 / 6				1308 / 789	1427 / 909	1727 / 1140	2060 / 1543
1600 / 6					1550 / 957	1875 / 1198	2241 / 1617
1800 / 6						2179 / 1312	2611 / 1765
Teeth	J250, V19, U20	J300, V23, U30	J300, V23, U30	J300, V29, U30	J350, V33, U35	J350, V33, V39, U35	J460, V51, U55
Quick coupler brackets	S45, S50 MS10 OQ45, OQ60 M18	S60 MS10 OQ60, OQ65 M18 S1 SW33	S60 MS10 OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33	S70 MS21 OQ70, OQ70-55 S2 SW48	S80 MS25 OQ80 S3 SW48	S90 OQ90 SW66